
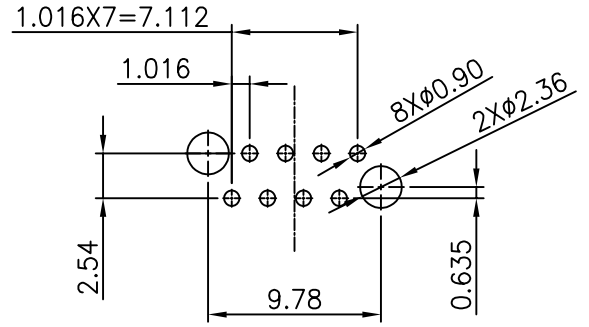


RoHS

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
A0			原始版本(INITIAL EDITION)		

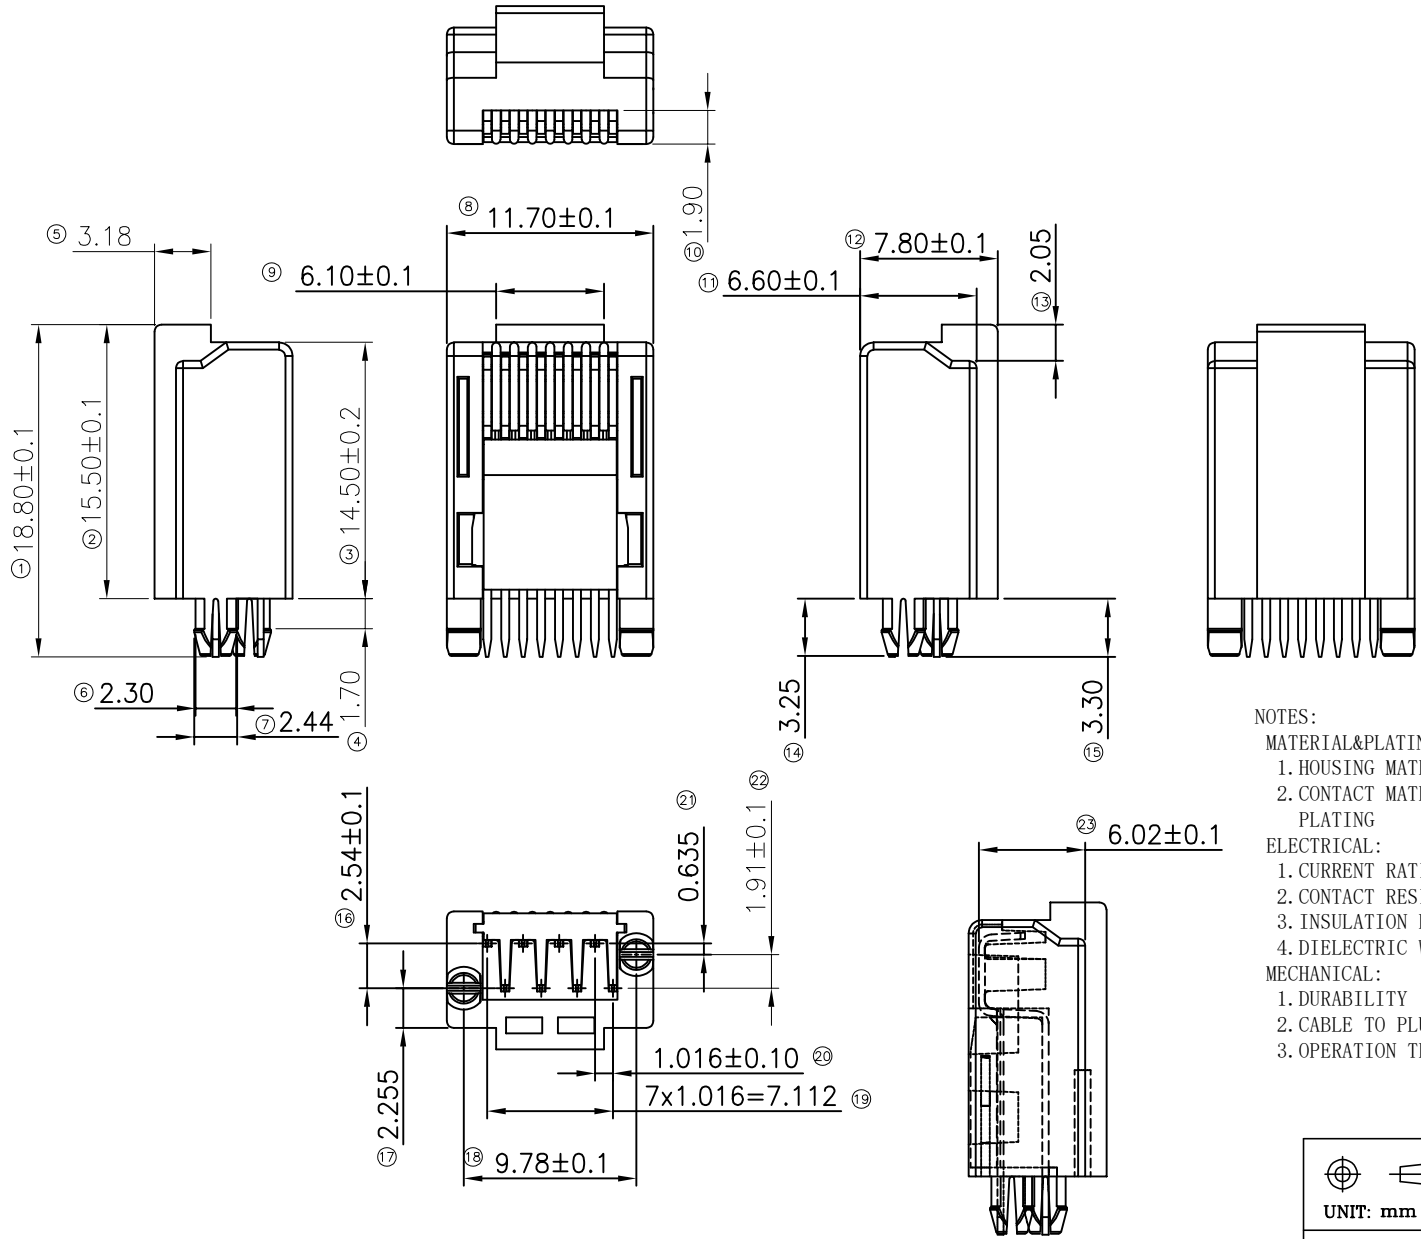

- NOTES:
- MATERIAL&PLATING:
- 1. HOUSING MATERIAL : PA9T BLACK UL 94V-0.
 - 2. CONTACT MATERIAL : PHOSPHOR BRONZE .
 - PLATING : GOLD FLASH PLATING OVER NICKEL.
- ELECTRICAL:
- 1. CURRENT RATING : 250V AC MAX, AT 2 AMP.
 - 2. CONTACT RESISTANCE : 20 mΩ MAX.
 - 3. INSULATION RESISTANCE : 500 MΩ MIN.
 - 4. DIELECTRIC WITHSTANDING : 1000 V.
- MECHANICAL:
- 1. DURABILITY : 2000 CYCLES.
 - 2. CABLE TO PLUG TENSILE STRENGTH 89N MIN
 - 3. OPERATION TEMPERATURE: -40°C to +85°C

备注:
未注尺寸公差按±0.1管控

 UNIT: mm [inch]	深圳市盈创利电子有限公司 Shenzhen Ying Chuang Li Electronics co., LTD.	
	DESIGN:	PART NAME:
	CHECKED:	PCB RJ45 PLUG PA9T黑色 半光亮锡10"
	APPROVED:	PART NO. 5H36-091A
TOLERANCE: X.X ±0.35 X.XX ±0.25 X.XXX ±0.15 Angle ±3.0'	SCALE:1:1 SIZE:A4	DRAW NO. SHEET NO. 1 OF 1