

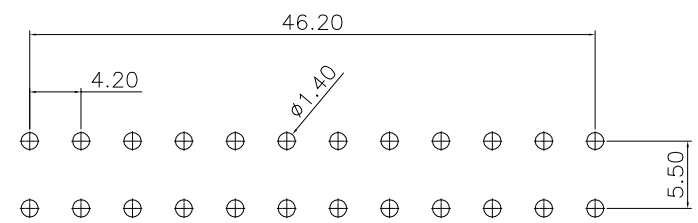



RoHS

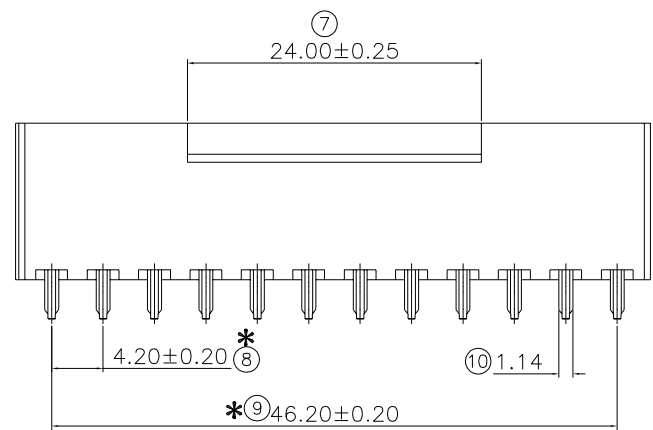

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
A0			原始版本(INITIAL EDITION)		

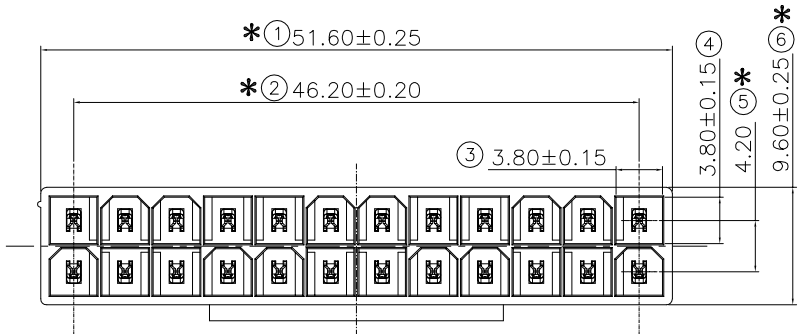

RECOMMENDED P. C. B PLAYOUT VIEW

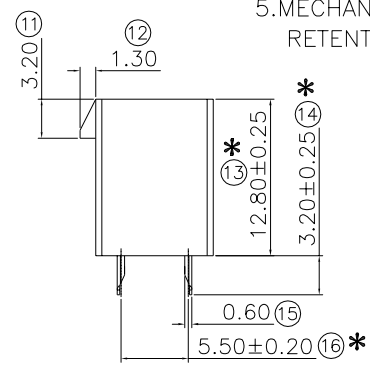
NOTES:
 1.MATERIAL:
 HOUSING:PBT UL94V-0,COLOR:BLACK
 CONTACT:BRASS.
 2.FINISH:
 CONTACT:120u" Min. MATTE TIN PLATING OR 120u" Min.
 BRIGHT TIN PLATING OVER 50u" MIN NICKEL.
 3.Wave Solder Capable TO:260°C±5°C
 4.ELECTRICAL:CURRENT RATINGS: 9 AMPERES PER CIRCUIT MAX
 VOLTAGE: 600V AC RMS
 5.MECHANICAL:
 RETENTION FORCE BEFONE OUDERING 1.5KGF MIN.



 UNIT: mm [inch]	 深圳市盈创利电子有限公司 Shenzhen Ying Chuang Li Electronics co., LTD.	
	DESIGN:	PART NAME: ATX 2X12 无柱 PBT黑色
TOLERANCE: X.X ±0.35 X.XX ±0.25 X.XXX ±0.15 Angle ±3.0°	CHECKED:	PART NO. 5T01-612B
APPROVED:		DRAW NO.
SCALE:1:1 SIZE:A4		SHEET NO. 1 OF 1

RoHS

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
AO			原始版本(INITIAL EDITION)		

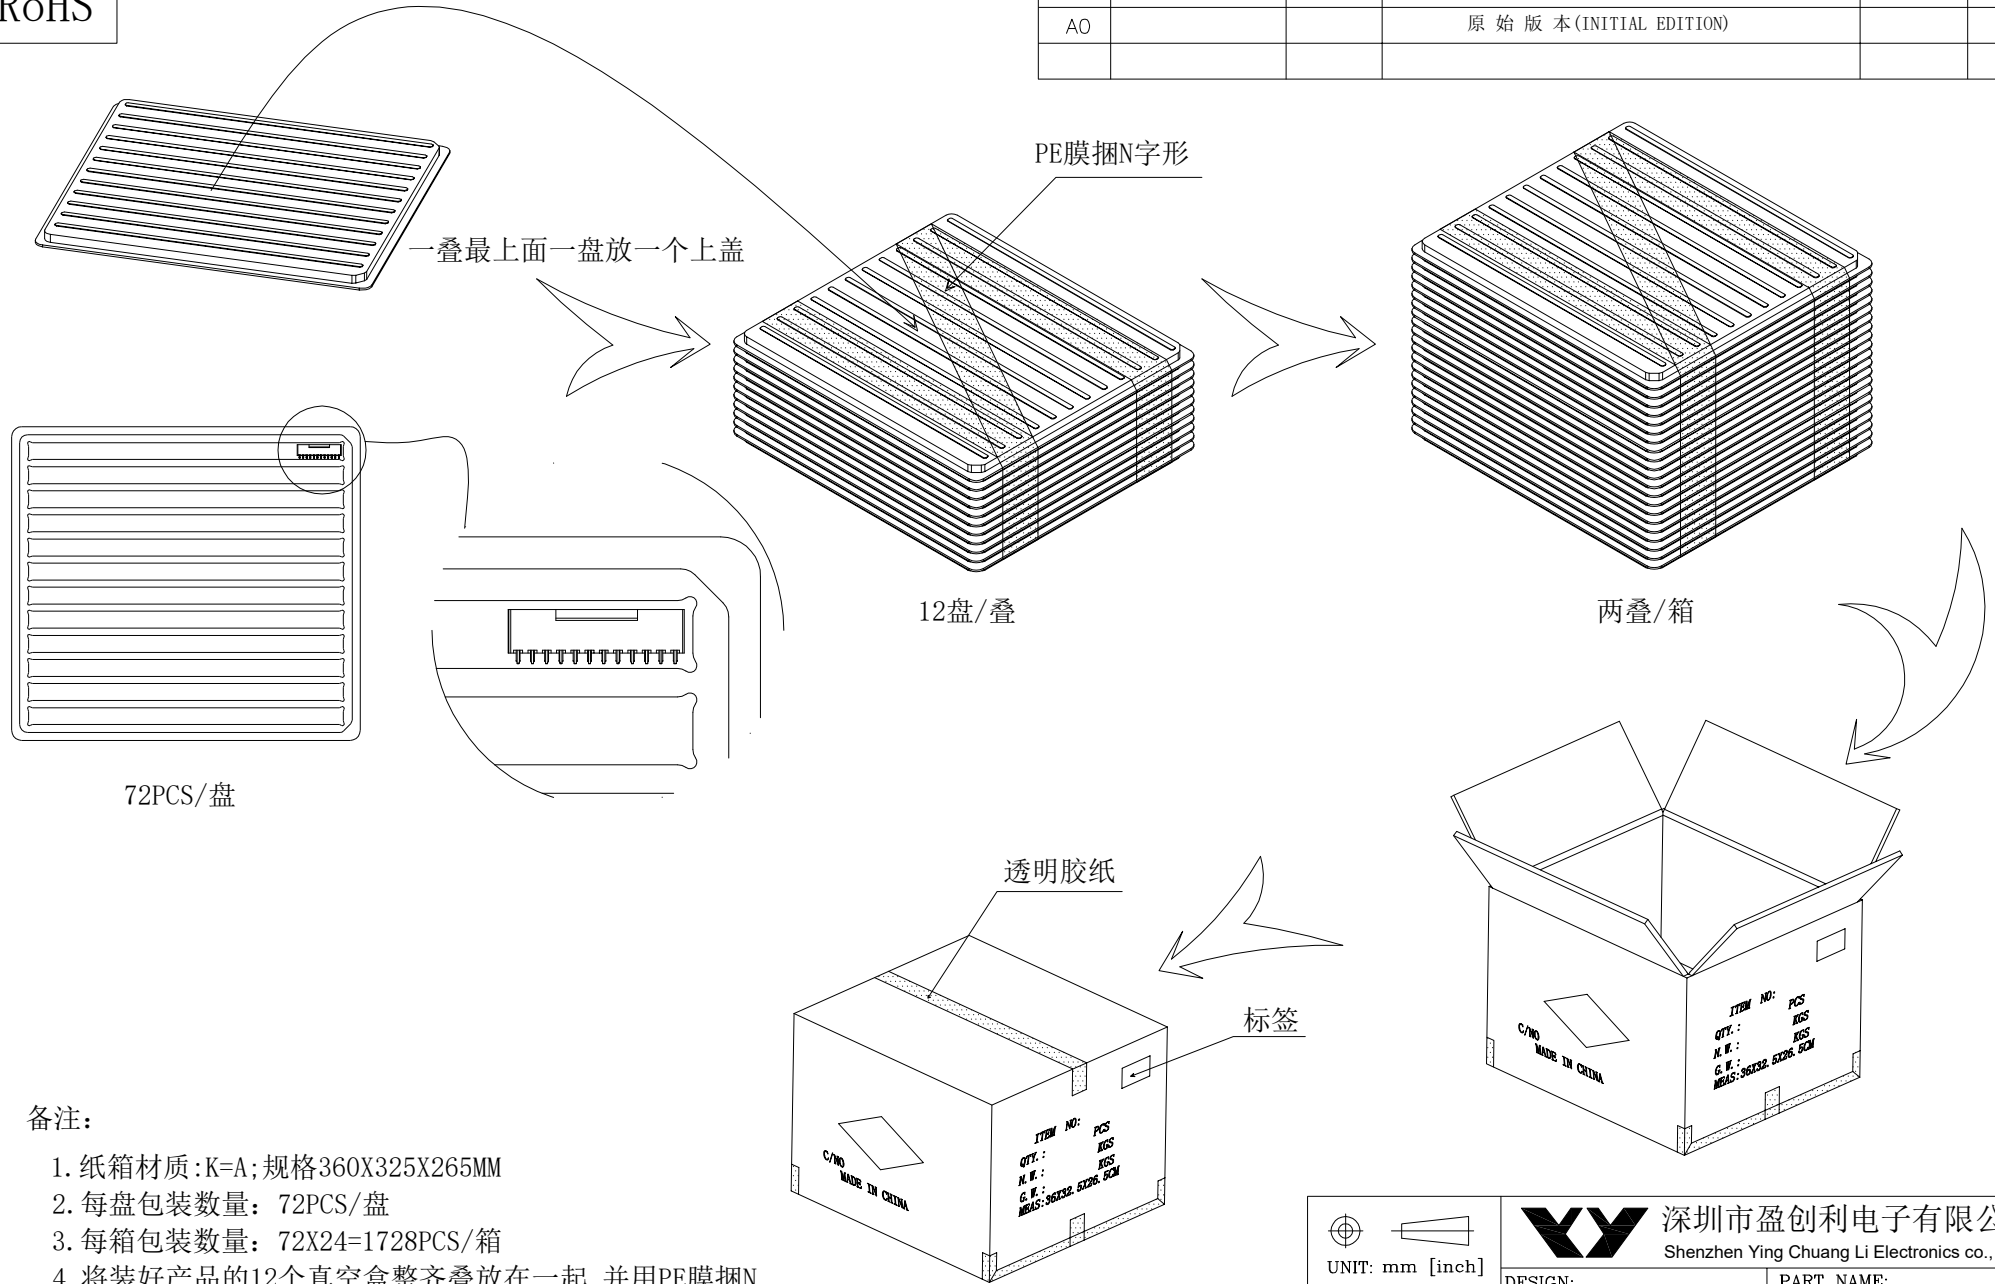

备注:

1. 纸箱材质:K=A;规格360X325X265MM
2. 每盘包装数量: 72PCS/盘
3. 每箱包装数量: 72X24=1728PCS/箱
4. 将装好产品的12个真空盒整齐叠放在一起,并用PE膜捆N字形,共两叠/箱1728PCS装入纸箱中,用封箱胶纸封好纸箱。

<p>UNIT: mm [inch]</p> <p>TOLERANCE: X.X ±0.35 X.XX ±0.25 X.XXX ±0.15 Angle ±3.0°</p> <p>SCALE:1:1 SIZE:A4</p>	<p>深圳市盈创利电子有限公司 Shenzhen Ying Chuang Li Electronics co., LTD.</p>	
	DESIGN:	PART NAME: ATX 2X12包装规范 24盘
	CHECKED:	PART NO. 5T01-612B
	APPROVED:	DRAW NO. SHEET NO. 1 OF 1